

Ürün verileri sayfası

Teknik Özellikler



beyaz sıva altı basmalı düğme
başlığı Ø22 yaylı dönüş işaretsiz.

ZB5AA1

Ana

Ürün serisi	Harmony XB5
Ürün Ya da Bileşen Tipi	Işıksız Buton için başlık
Ürün Grubu	ZB5
şev malzemesi	Koyu gri plastik
montaj çapı	22,5 mm
başlık tipi	Standard
bölünemez miktar başına satış	1
sinyalleme birimi başlığı biçimi	Yuvarlak
operatörün tipi	yaylı kurma
operatör profili	Beyaz sıva altı, işaretsiz

Tamamlayıcı

CAD genel genişliği	29 mm
CAD genel yüksekliği	29 mm
CAD genel derinliği	28 mm
ürün ağırlığı	0,018 kg
Mekanik dayanıklılık	10000000 cycles
istasyon adı	XALD 1...5 kesim XALK 2...5 kesim
elektrik yapısı kodu	C1 için <9 kontaklar kullanılarak Tek bloklarön montaj C2 için <9 kontaklar kullanılarak tek ve çift bloklarön montaj C11 için <3 kontaklar kullanılarak Tek bloklarön montaj C15 için <1 kontaklar kullanılarak Tek bloklarön montaj SF1 için <3 kontaklar kullanılarak Tek bloklarön montaj SR1 için <3 kontaklar kullanılarak Tek bloklararka montaj
cihaz sunumu	Temel elaman

Ortam

koruyucu bakım	TH
Depolama Ortam Koşulları	-40...70 °C
Nominal Çalışma Ortam Sıcaklığı	-40...70 °C
aşırı gerilim kategorisi	Class II conforming to IEC 60536
IP koruma derecesi	IP66 'e uygun IEC 60529 IP67 IP69 IP69K

Sorumluluk Reddi: Bu belge, belirli kullanıcı uygulamaları için bu ürünlerin uygunluğu veya güvenliliğini belirlemek amacıyla kullanılamaz ve bunların yerini tutmayı amaçlamaz.

Enclosure Type	UL type 4X/13
yüksek basınçlı rondelaya direnç	7000000 Pa -de 55 °C, mesafe: 0,1 m
IK koruma derecesi	IK03 conforming to IEC 50102
Standartlar	UL 508 JIS C8201-5-1 IEC 60947-1 IEC 60947-5-4 IEC 60947-5-1 CSA C22.2 No 14 JIS C8201-1
Ürün Sertifikaları	DNV CSA BV LROS (Lloyds register of shipping) UL listeli
darbe dayanımı	30 gn (süre = 18 ms) için yarım sinüs dalgası hızlandırma 'e uygunIEC 60068-2-27 50 gn (süre = 11 ms) için yarım sinüs dalgası hızlandırma 'e uygunIEC 60068-2-27
titreşim direnci	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6

Paketleme üniteleri

Unit Type of Package 1	PCE
Paketteki birim sayısı	1
Package 1 Height	4,500 cm
Package 1 Width	3,400 cm
Package 1 Length	5,400 cm
Paket ağırlığı (Lbs)	17,000 g
Unit Type of Package 2	S03
Number of Units in Package 2	300
Package 2 Height	30,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	5,617 kg
Unit Type of Package 3	P06
Number of Units in Package 3	2400
Package 3 Height	75,000 cm
Package 3 Width	60,000 cm
Package 3 Length	80,000 cm
Package 3 Weight	54,812 kg

Sözleşme garantisi

Garanti (ay olarak)	18
---------------------	----

Environmental Data

Schneider Electric, ürün kullanım ömrünü ve geri dönüştürülebilirliği uzatmak amacıyla devam eden "Use Better, Use Longer, Use Again" kampanyamız aracılığıyla tedarik zinciri ortaklıkları, daha düşük etki malzemeleri ve döngü yoluyla 2050 yılına kadar Net Sıfır değerine ulaşmayı hedeflemektedir.

[Açıklanan Environmental Data >](#)

[Ürün sürdürülebilirliğini nasıl değerlendiriyoruz >](#)



Çevresel ayak izi

Toplam yaşam döngüsü Karbon ayak izi	0.2 kg CO2 eq.
Üretim aşamasının karbon ayak izi [A1–A3]	0.1 kg CO2 eq.
Dağıtım aşamasının karbon ayak izi [A4]	0 kg CO2 eq.
Kurulum aşamasının karbon ayak izi [A5]	0 kg CO2 eq.
Kullanım aşamasının karbon ayak izi [B2, B3, B4, B6]	0 kg CO2 eq.
Ömür sonu aşamasının karbon ayak izi [C1–C4]	0 kg CO2 eq.
Çevre Beyanı	Çevresel Ürün Profili

Use Better



Malzemeler ve Ambalajlama

Geri dönüştürülmüş plastik içeriğin ortalama yüzdesi	6 %
Geri dönüştürülmüş metal içeriğinin ortalama yüzdesi	29 %
Geri dönüşüm kartonlu paket	Evet
Plastik olmayan ambalaj	Evet
AB RoHS Direktifi	Uyumlu
REACH Yönetmeliği	Referans, eşik üzerinde SVHC içermekte

Use Longer



Kullanım ömrü uzatma

Onarım	Hayır
--------	-------

Use Again




Yeniden paketlenme ve yeniden üretim

Geri dönüştürülebilirlik potansiyeli, % olarak	0
Döngüsellik Profili	Kullanım Sonu Bilgileri
Geri alma	Yok

Dimensions Drawings


Dimensions



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

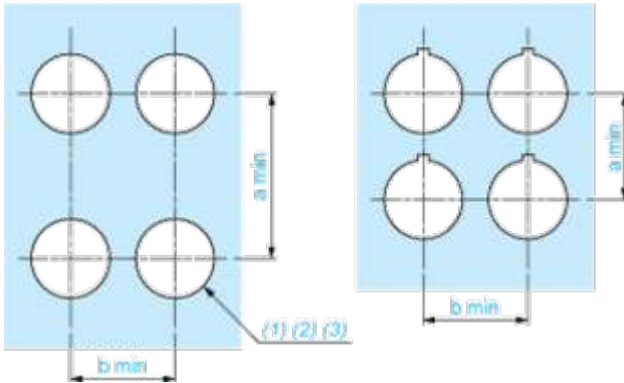

- (1) Diameter on finished panel or support
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
(3) Ø22.5 mm recommended ($Ø22.3_0^{+0.4}$) / Ø0.89 in. recommended ($Ø0.88_0^{+0.016}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess

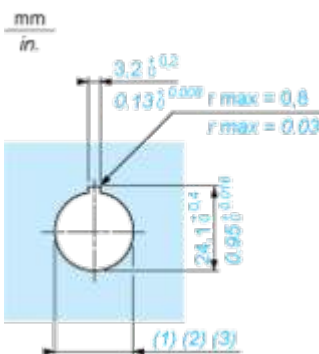

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3^{+0.4}₀) / Ø0.89 in. recommended (Ø0.88 in. ^{+0.016}₀)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

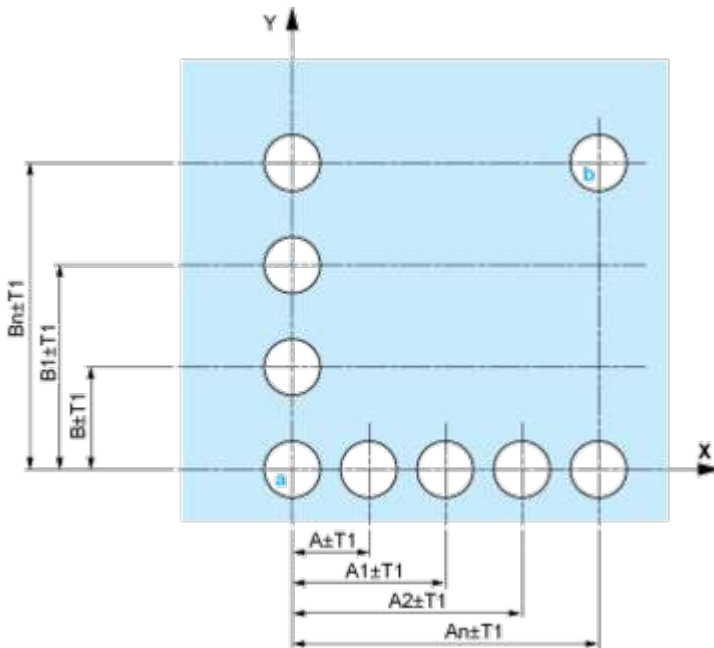


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

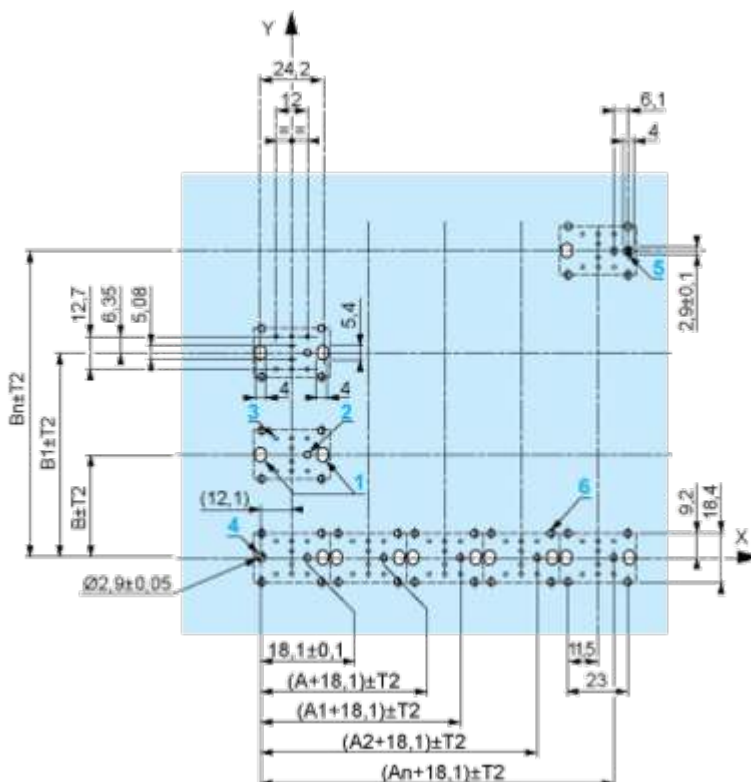

A: 30 mm min.

B: 40 mm min.

Dimensions in in.

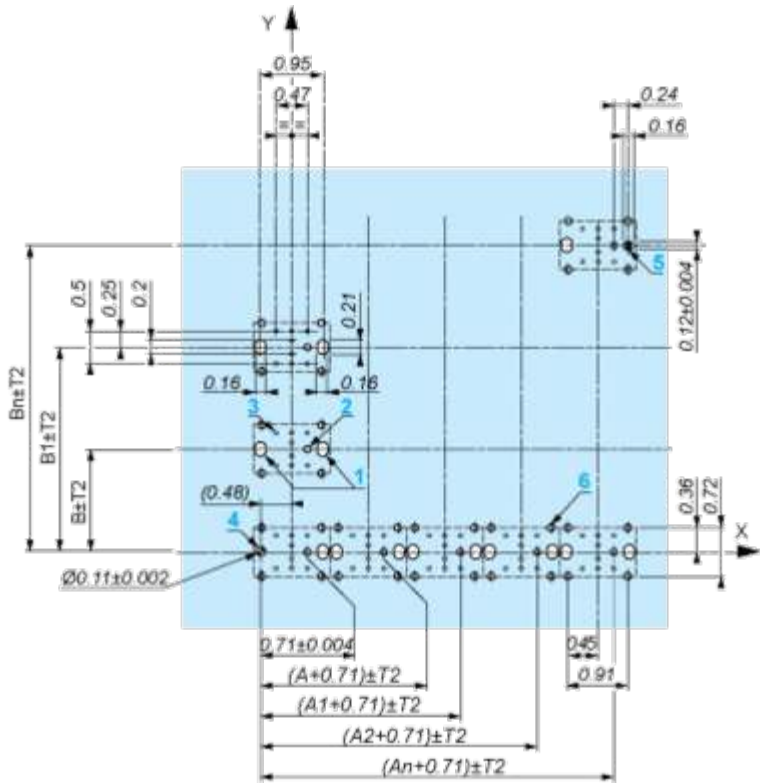

A: 1.18 in. min.
B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2° 30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB5AD*, ZB5AJ*, ZB5AG*).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

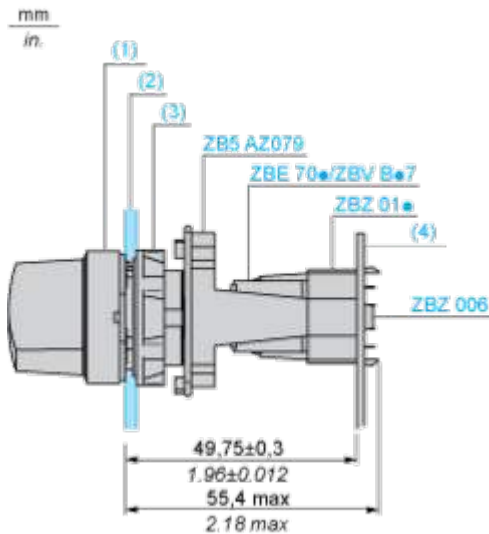

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole $\varnothing$ 2.4 mm $\pm$ 0.05 / 0.09 in. $\pm$ 0.002 for centring adapter ZBZ01•
- 3 8 $\times$ $\varnothing$ 1.2 mm / 0.05 in. holes
- 4 1 hole $\varnothing$ 2.9 mm $\pm$ 0.05 / 0.11 in. $\pm$ 0.002, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes $\varnothing$ 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the $\varnothing$ 2.4 mm $\pm$ 0.05 / 0.09 in. $\pm$ 0.002 holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Code C1



Electrical Composition Corresponding to Code C2



Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location



Image of product / Alternate images

Alternative



